

RK42-9PL



Made for professional certified networks

Specification:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard.

Material:


SPCC cold rolled steel

Thickness :

Square hole strips 1.2 mm others 1.0 mm

Surface finish :

Degreasing, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

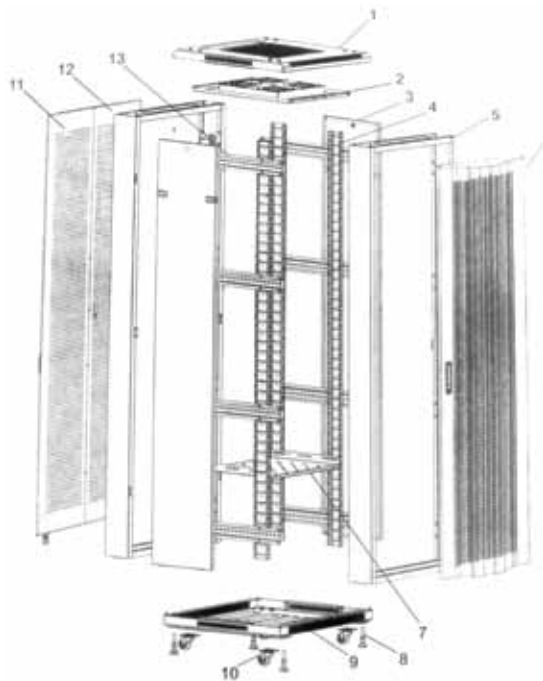

1. Top cover
2. Fan tray
3. Side panel
4. Rail
5. Frame
6. Front door
7. Fixed shelf
8. M12 adjustable feet
9. Bottom
10. Castor with brake
11. Ventilation rear door-right
12. Ventilation rear door-left
13. Beam



Dimensiones:

UH= 185 cm; UW= 48,26 cm; UD= 81 cm
PH= 205 cm; PW= 60 cm; PD= 90 cm
EH= 205,5 cm; EW= 60,5 cm; ED= 90,5 cm
Peso con empaque: 107 kg.

Leyenda:

Dimensiones útiles interiores (cms): Alto=UH ; Ancho=UW ; Profundidad=UD
Dimensiones exteriores producto (cms): Alto=PH ; Ancho=PW ; Profundidad=PD
Dimensiones exteriores empaque (cms): Alto=EH ; Ancho=EW ; Profundidad=ED