

RK42-9P8L



Made for professional certified networks

Specification:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494; PART1, DIN41494; PART7, ETSI standard.

Material:


SPCC cold rolled steel

Thickness :

Square hole strips 2.0 mm others 1.2 mm

Surface finish :

Degreasing, acid pickling, rust prevention and parkerizing, pure water cleaning, static electricity plastic painting.

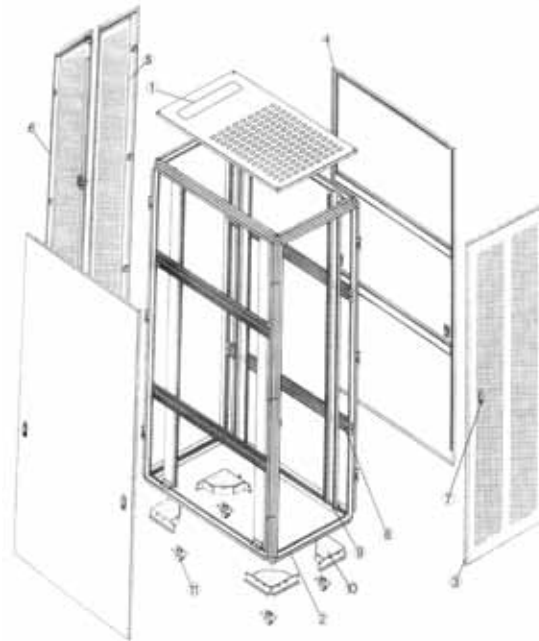

1. Top cover
2. Bottom
3. Front vented door
4. Side door
5. Ventilation rear door-right
6. Ventilation rear door-left
7. Front door lock
8. Frame
9. Trall
10. Castor seat
11. Castor



Dimensiones:

UH= 186 cm; UW= 48,26 cm; UD= 76 cm
PH= 202 cm; PW= 81 cm; PD= 91 cm
EH= 202,5 cm; EW= 81,5 cm; ED= 91,5 cm
Peso con empaque: 128 kg.

Leyenda:

Dimensiones útiles interiores (cms): Alto=UH ; Ancho=UW ; Profundidad=UD
Dimensiones exteriores producto (cms): Alto=PH ; Ancho=PW ; Profundidad=PD
Dimensiones exteriores empaque (cms): Alto=EH ; Ancho=EW ; Profundidad=ED